




TIGER TRACTOR CORPORATION
KEYSER, WEST VIRGINIA

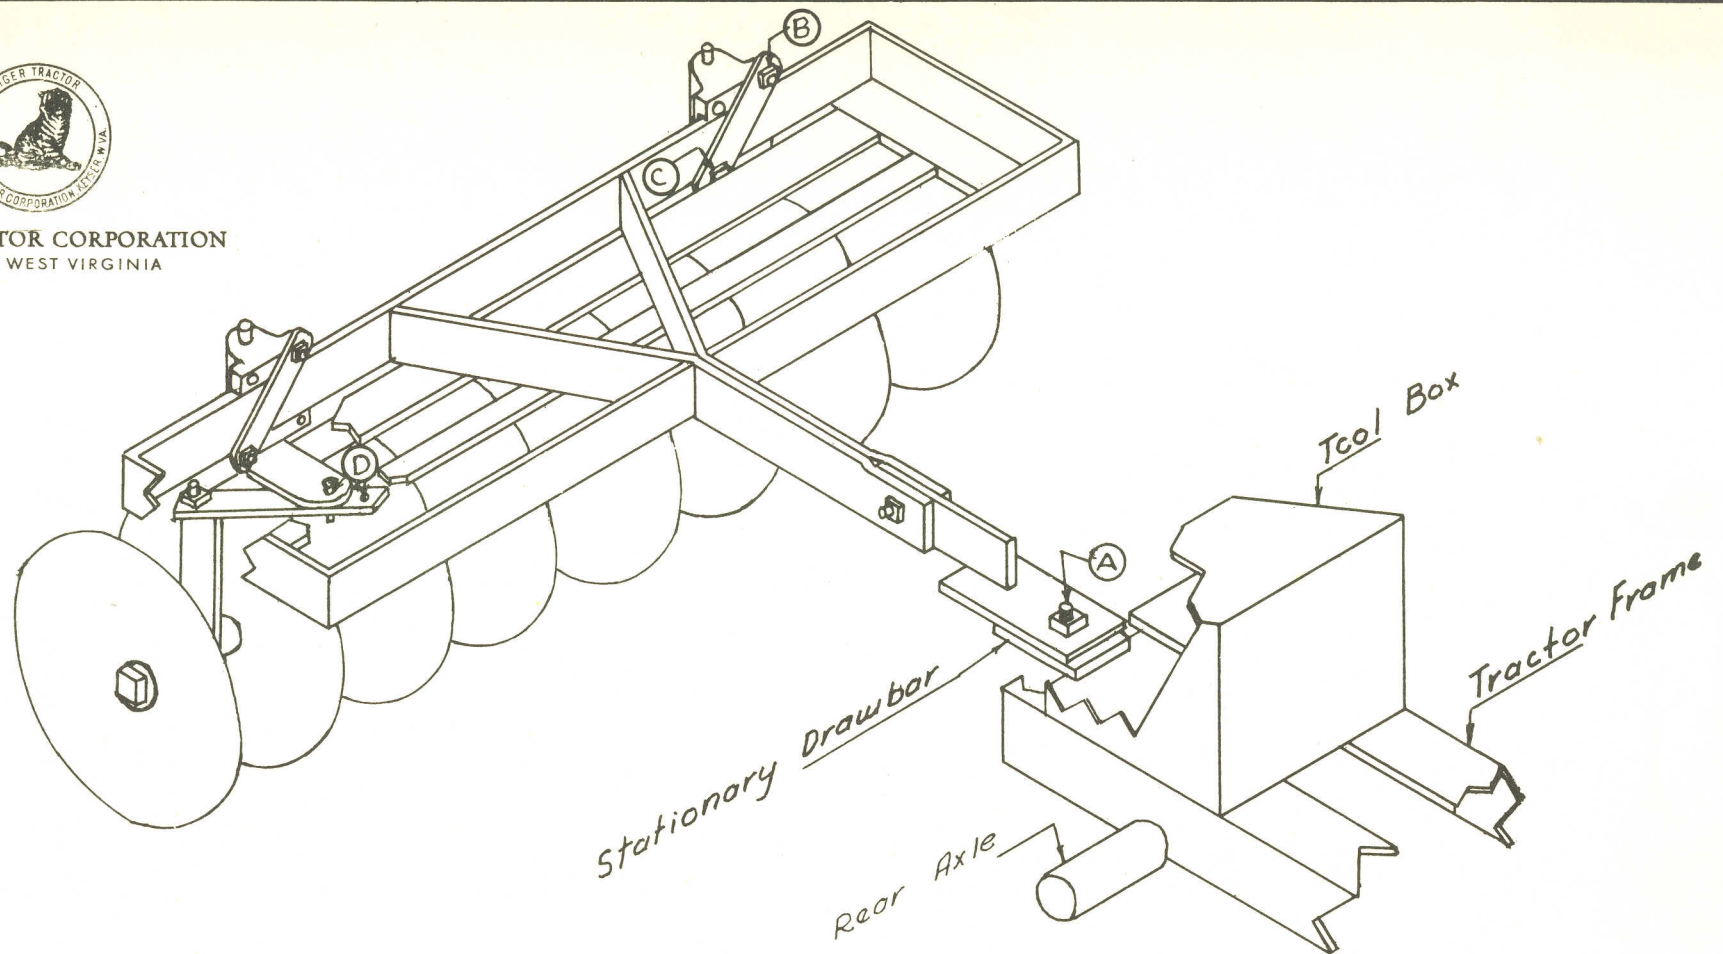

INSTRUCTIONS FOR MOUNTING TIGER TRACTOR DISC HARROW 1954 MODEL

- 1- ATTACH SWIVEL HITCH TO STATIONARY DRAWBAR ON TRACTOR FRAME AT POINT "A"
- 2- DISC GANGS ARE REVERSIBLE, 360° SWIVEL, AND CAN BE SET TO THROW IN (HILLING & CLOSING FURROWS) OR TO THROW OUT (OPENING FURROWS & STANDARD DISCING.)
- 3- TO SET GANGS CLOSE TOGETHER OR FAR APART LOOSEN BOLTS AT POINTS "B" & "C" AND ADJUST TO DESIRED POSITION.
- 4- TO ADJUST ANGLE OF CUT, EITHER STRAIGHT AHEAD, RIGHT CUT OR LEFT CUT, SET PIN AT POINT "D" TO DESIRED POSITION.
- 5- FOR GREATER PENETRATION ADD CONCRETE BLOCKS OR OTHER HEAVY OBJECTS TO WEIGHT BOX.